


202

STAINLESS STEEL BALL VALVE 2 PIECE FULL BORE LOCKABLE BSP, BSPT, NPT

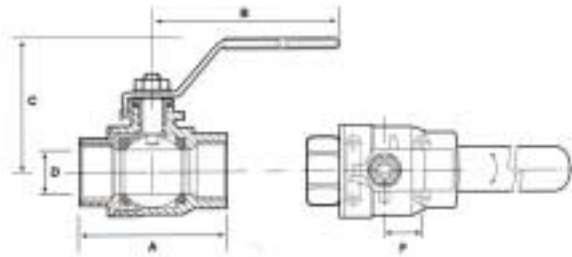

MATERIALS	
BODY	Cast Stainless Steel CF8M
BALL	316 Stainless Steel Precision Machined and Mirror Finished
SPINDLE	316 Stainless Steel
SEAT/SEALS	RPTFE (MG 1241)
O-RING	RPTFE (MG 1241)
HANDLE	Stainless Steel 304 c/w Thermo Insulating Sleeve

OPTION: Can be supplied Silicon Free
Available with ISO Mounting Pad Drilled and Tapped

DIMENSIONS AND SPECIFICATIONS															
SIZE	A	B	C	D	E	F	G	H	I	J	WEIGHT KG	PRESSURE PN	TEMP - °C +	TORQUE in Nm	FLOW Kv
1/8															
1/4	55.0	96.0	50.0	11.6		12.7					0.285	140	-20 > 200	7.12	6.88
3/8	60.0	96.0	50.0	12.7		12.7					0.285	140	-20 > 200	7.12	8.60
1/2	75.0	96.0	53.0	15.0		12.7					0.430	140	-20 > 200	8.54	11.18
3/4	80.0	125.0	64.0	20.0		22.4					0.660	140	-20 > 200	12.81	25.80
1	90.0	125.0	66.0	25.0		22.4					0.895	140	-20 > 200	19.93	38.70
1 1/4	110.0	170.0	79.0	32.0		25.4					1.300	100	-20 > 200	31.32	68.80
1 1/2	120.0	170.0	83.0	38.0		25.4					2.100	100	-20 > 200	37.02	103.20
2	140.0	190.0	94.0	50.0		25.4					3.400	100	-20 > 200	54.10	199.52
2 1/2	167.0	250.0	136.0	65.0							7.000	68	-20 > 200	91.12	275.20
3	181.0	250.0	149.0	77.0							10.000	68	-20 > 200	136.68	481.60
4															
5															
6															
8															

Pressure rating dependent upon temperature. Figures shown are maximum examples only.
Information correct at the time of going to press. We reserve the right to alter specifications without notice.



Unit 32, Mere View Industrial Estate, Yaxley, Cambridgeshire, PE7 3HS, UK

Tel: +44 (0) 1733 243400, Fax: +44 (0) 1733 243344, e-mail: info@epsLtd.co.uk, www.epsLtd.co.uk